

MULTI-CROP HARVESTER



2560



2560

The 2560 multi-crop harvester tackles the challenging environments associated with seed corn and sweet corn operations making it the number 1 choice for box-on corn harvester applications around the world. The sound design, powerful John Deere 9.0L Final Tier 4/Stage V (9.0L Tier 3 for certain regions) engine, simplified maintenance and upkeep attributes result in an unsurpassed level of reliability and uptime.

TRANSPORT & LOGISTICS

The 2560 was designed with the transport limitations of many growing regions in mind. With an overall chassis width of only 123" (3.12 meters) with standard 650/75R32 tires, the 2560 conforms to the most stringent road travel and transport restrictions.

EFFICIENCY BENEFITS

- The fuel efficient 2560 can run a full 24 hours at capacity without stopping to refuel.
- 54-inch feederhouse easily conveys up to 35 tons of seed corn per hour.
- 530 cubic foot box unloads in minutes.

RELIABLE PERFORMANCE

The Oxbo 2560 is the latest generation of a harvester with a decades long record of reliable service. The

2560 is built with longevity and fuel economy in mind. Oxbo knows your equipment is subject to very demanding conditions. The four-wheel mechanical drivetrain helps you maneuver through the muddiest and toughest field conditions. The high capacity cooling package keeps all systems safe even in high temperature harvesting conditions.

TECHNOLOGY FOR OPERATIONS

Standard features and options are available to reduce stress and fatigue for all operators and condense the learning curve for newer operators. Automatic Header Height Control, YieldTrakk GPS mapping to measure yields for agronomic analysis and live box weight, Steer-By-Stalk and FleetCommand telematics make the time from training to efficient operation a short turnaround.

TRUSTED SERVICE & SUPPORT TEAMS

Oxbo understands niche ag and the tight schedules to get crops harvested in time. Our online parts and support system; OxboConnect means you have access to information necessary to keep your equipment in peak operating condition. If needed, our mobile technicians are available to assist you with in-field support and extended hours during peak harvesting times. You can count on Oxbo for service and support when and where you need them!

2560 FEATURES



POWERFUL JOHN DEERE ENGINE

- Reliable and powerful 9.0 L Final Tier 4/Stage V engine (T3 engine available for some geographical regions).
- Clean, efficient power with latest EPA and EU compliance.
- Improved torque curve.
- Reduced operating RPM.
- Optimized fluid consumption economy.
- Quieter, smoother operation.

EXCELLENT VISIBILITY & ACCESSIBILITY

- Roomy cab design.
- Panoramic view.
- Cross Controls CCPilot 7" Freely Programmable multifunctional display.
- Ergonomic joystick.
- Simple harvest function controls for ease of operation.

DUMP BOX FEATURES

- High clearance dump box.
- Large capacity box can lift up to 7 tons of crop.
- Rapid dump and recycle times.
- Optional load inspection ladder and extension kits.
- Optional belted dump box floor meters product flow for reduced damage and spillage.



2560 FEATURES

STANDARD FEATURES

The durable 25 series harvesters have been tested over decades to determine needed features. Oxbo harvesters are designed with standard features needed for effective operations in most conditions. Additional configurations are available to customize your harvester to fit your needs.



DESIGNED FOR DURABILITY

- Ample horsepower and torque for challenging terrain.
- Designed for longer seasons and tough conditions.

EASIER ACCESS

- Wide right hand catwalk.
- Easy access step accessible from header.
- Convenient steps on both sides of the cab.

AGILE CHASSIS

- A full 42 degrees of articulation for the tightest turns and improved muddability.
- Chassis oscillates for constant ground contact in roughest conditions.

CLEANING FAN FEATURES

- Powerful single 40" fan.
- 8 blade with 10° pitch for gentle handling during cleaning process.
- Cleaner loads with more product and less trash to improve logistics.
- Adjustments are made from operator station for the cleanest loads.



2560 FEATURES

OPTIONAL FEATURES

Oxbo harvesters are available with multiple options to make operations easier and more intuitive for even the most novice operators. Fleet managers can utilize FleetCommand telematics to monitor machine settings and operating parameters.



LATEST TECHNOLOGY

- Optional YieldTrakk mapping system.
- GPS mapping system to measure crop yields.
- Gives insight for agronomic analysis.
- Provides accurate live box weight for logistics.
- Premium Topcon X35 12.1" display.

FLEETCOMMAND TELEMATICS


- Optional telematics feature.
- Utilize the accuracy and innovation of FleetCommand to monitor machine location, functions and other important information.
- Screens show maintenance reports and alerts.

IMPROVED VISIBILITY OPTIONS

- Powered mirrors. No need to leave the seat for optimal viewing.
- LED lighting kit for improved 24 hour visibility, making it easier to see and be seen.
- Row finder lights for night harvesting.

CAMERAS IN KEY LOCATIONS

- Optional camera system for in-cab view of critical areas.
- Cameras strategically placed in dump box and on the bumper allows for monitoring of harvest operations.
- Provides view of dump box and product flow.
- Assists with rearview and maneuvering of harvester.

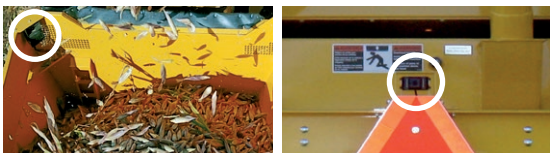

SPECIFICATIONS

Dimensions (with standard tire)		
Length without header	28 ft 6 in (8.67 m)	
Width without header	10 ft. 3 in (3.12 m)	
Height	13 ft 3 in (4.04 m)	
Wheelbase	13 ft 8 in (4.17 m)	
Track width (wheel center lines)	8 ft 1 in (2.46 m)	
Inside turning radius	19 ft (5.79 m)	
Weight without header	34,620 lbs (15,703 kg)	
Tires		
Standard 650/75R32	Goodyear Dyna Torque Radial	
Engine	EU Stage V	Tier 3 (available for export only)
Engine model	John Deere 6090 T4/Stage V	John Deere 6090 T3
Horsepower	275 hp @ 2200 rpm (205 kW)	275 hp @ 2200 rpm (205 kW)
Tank Capacities	EU Stage V	Tier 3 (available for export only)
Fuel	230 gal (870.7 L)	230 gal (870.7 L)
DEF	12 gal (45.4 L)	NA
Hydraulic reservoir	84 gal (318 L)	84 gal (318 L)
Cooling system	8 gal (30.3 L)	8 gal (30.3 L)
Crankcase	8.19 gal (31 L)	5 gal (18.9 L)
Dump Box		
Volume	530 ft ³ (15.0 m ³)	
Dump box lifting capacity	14,000 lbs (6,350 kg)	
Dump height to dump box lip	8 ft 9 in - 14 ft 10 in (2.67 m - 4.52 m) without extension	
Dump angle	43 degrees from horizontal	
Dump reach (with standard tire)	43 in (1.09 m) without extension 54 in (1.37 m) with extension	
Harvesting Head Capabilities		
Seed & Processed Sweet Corn	Oxbo 3000 & 60 Series (9 row max)	



Oxbo International
100 Bean Street
Clear Lake, WI 54005

Visit our website at
oxbo.com

 **715.263.2112**

800.628.6196