

## ***CORN HEADS***



***60 Series Corn Heads***





## **60 SERIES HEADS**

### ***FLEXIBLE DESIGN***

Proven in seed corn, the Oxbo 60 Series has been tested and designed for both seed corn and sweet corn harvesting. For decades, Oxbo heads have been the choice of growers in over 20 countries and Oxbo is excited to offer the flexibility to harvest both types of corn.

### ***BENEFITS***

- Gentle SoftTouch harvesting with less ear and end damage means higher yields
- Ability to pick in tough conditions
- Folding heads make transport easier without having to rely on transport carts
- Lower horsepower requirements
- Easy cleanout, maintenance and adjustments
- Improved contoured row separator design directs crop flow into feederhouse for less crop loss
- Integrated cab controls for on-the-fly setting changes

### ***FLEXIBILITY IN DESIGN AND CHOICES***

Each customer has different needs and purposes for their operation. That's why Oxbo offers a wide range of models with many configurations and options. Oxbo 60 Series heads come in sizes from 4 rows up to 16 rows, and folding or rigid head models.

### ***NEW FEATURES***

The 60 Series heads have added several new standard features to offer you more value and versatility in your purchase. Easy belt adjustments can be made without tools thanks to the patented QRT, quick release tensioner. Simply release the QRT, flip the belts or adjust the tension and push the QRT into the locked position. The patented auger pan and larger diameter auger deliver better quality and even feeding in all crop conditions.

### ***PROVEN PERFORMANCE***

After years in the field and thousands of acres, Oxbo 60 Series heads have proven themselves to be reliable and rugged. Our customers demand it!



# 60 SERIES FEATURES

## STANDARD FEATURES

Oxbo heads are built to handle the harsh environments of corn harvesting. The new features added to the 60 Series corn head proves our dedication to designing the perfect head, capable of harvesting both seed and processed corn. Multiple configurations and several options are available.




## FOLDING HEAD DESIGN

- Available for rapid transport, just fold and go!
- No need for a header trailer, increased productivity.
- Use the available larger heads without over-width permitting.
- Patented lift and lock mechanism.



## EASY ADJUSTMENTS

- Patented QRT (Quick release tensioner) allows for easy and rapid adjustments without tools.
- RASP and stripper plates are quickly adjusted in the cab.
- Header height sensors and steer-by-stalk options increase accuracy and reduce operator stress.
- Quick-adjust nose point heights allow for different conditions.

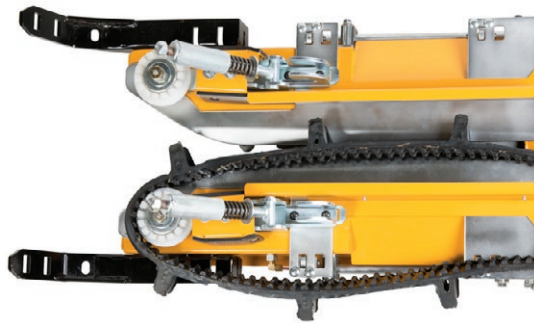

## LARGE DIAMETER AUGER

- Provides a more even flow of material in heavy crop or wet conditions.
- Improved flighting design reduces ear damage.
- Concave auger pan gently conveys ears to feeder house.
- Patented auger pan shape improves product flow.



## SPECIALLY DESIGNED ROW UNITS

- Easy access dividers flip-up with simple latches and gas struts.
- Knife roll profile and orientation optimize ear removal and are less damaging.
- Deep, intermeshing knife rolls process stalks more thoroughly and patented blade design improves feeding.
- Gathering belts gently convey ears to the auger.



## FOLDING HEAD SPECIFICATIONS

Model	6004	6004	6006	6008	6012	6014	6016
Harvest width	126 in (3.2 m)	118.8 in (3.02 m)	173.9 in (4.42 m)	246.1 in (6.25 m)	366 in (9.29 m)	425.7 in (10.81 m)	487.7 in (12.34 m)
Folded width	89.28 in (2.32 m)	89.21 in (2.32 m)	125.7 in (3.19 m)	134.4 in (3.41 m)	194.7 in (4.95 m)	254.7 in (6.47 m)	254.7 in (6.47 m)
Drives	HYD	HYD	HYD	HYD	PTO	PTO	PTO
Number of rows	4	4	6	8	12	14	16
Row spacing	30 in (76.2 cm)	70 cm	70 cm	30 in (76.2 cm)	30 in (76.2 cm)	30 in (76.2 cm)	30 in (76.2 cm)
Number of Auto Header height sensors (optional)	Maximum of 2	Maximum of 2	Maximum of 2	Maximum of 3	Maximum of 4	Maximum of 4	Maximum of 4
Number of Steer by Stalk sensors (optional)	Maximum of 2	Maximum of 2	Maximum of 1	Maximum of 2	Maximum of 2	Maximum of 2	Maximum of 2

## RIGID HEAD SPECIFICATIONS

Model	6004 & 6005	6006	6010	6011	6012	6014	6016
Harvest width	126.1 in (3.2 m) for 4 row  156.1 in (3.96 m) for 5 row	186.1 in (4.73 m)	220.4 in (5.60 m)	240.8 in (6.12 m) for 52cm  311.7 in (7.92 m) for 70 cm	366.8 in (9.29 m)	302.2 in (7.68 m) for 52 cm  394.4 in (10.02 m) for 70 m  426.1 in (10.82 m) for 30in	486.1 in (12.35 m)
Drives	HYD	PTO	PTO	PTO	PTO	PTO	PTO
Number of rows	4 or 5	6	10	11	12	14	16
Row spacing	30 in (76.2 cm)	30 in (76.2 cm)	52 cm	52 cm or 70 cm	30 in (76.2 cm)	52 cm, 70 cm or 30 in	30 in (76.2 cm)
Number of Auto Header height sensors (optional)	Maximum of 2	Maximum of 2	Maximum of 3	Maximum of 4	Maximum of 4	Maximum of 4	Maximum of 4
Number of Steer by Stalk sensors (optional)	Maximum of 2	Maximum of 2	Maximum of 2	Maximum of 2	Maximum of 2	Maximum of 2	Maximum of 2



Oxbo International  
100 Bean Street  
Clear Lake, WI 54005

Visit our website at  
**oxbo.com**



**715.263.2112**

**800.628.6196**