

Bankout Shuttle



WT1000

The bankout shuttle drives productivity with a top speed of 22 MPH. The air bag suspension delivers performance and comfort over the rough orchard terrain.

Enclosed cab with optional air conditioning provides comfortable operation, protection and full visibility.


Auto rear steering centering enhances driver precision; Poclain motors deliver four-wheel drive performance and durability and low maintenance.

Featuring joystick control and rear view camera, the bankout is easy to operate; buttons and switches are in easy reach.

Multi-stage telescopic cylinders provide a wide range of tilting angles for fast, easy, and complete product unloading.

- ✓ **Dual leveling augers**
- ✓ **Heavy-duty, multi-stage telescopic cylinders**
- ✓ **Rear controlled electric hydraulic pump**
- ✓ **2-speed ground drive system**
- ✓ **Air bag suspension**
- ✓ **Large, custom radiator, oil cooler and charge air cooler package with reversing fan**
- ✓ **134hp John Deere engine**
- ✓ **33 x 15.5 x 14-ply turf tires**

SPECIFICATIONS

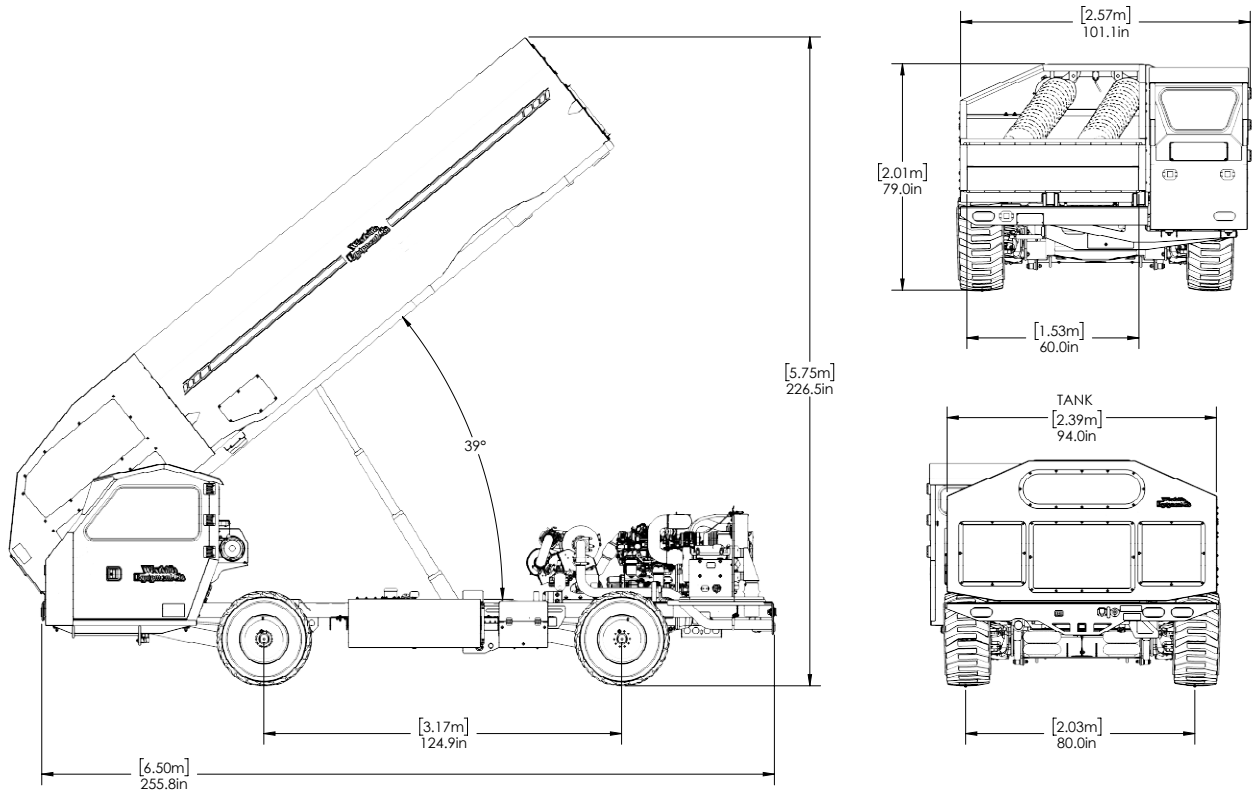

 559-577-1800

[OXBO.COM](https://www.oxbo.com)