

BERRY HARVESTER



40 YEARS
BERRY
HARVESTING

9140

9140 | FRESH MARKET RASPBERRY HARVESTER

Oxbo backs all of its harvesters with decades of experience building and supporting specialty harvesting solutions. With dealers and service providers around the globe, Oxbo stands behind its equipment with readily available parts and in-field service support.





OXBO 9140

QUALITY. CAPACITY. PERFORMANCE.

The single drop Oxbo 9140 harvester delivers high quality raspberries at an entry-level price point. The 9140 delivers the selective harvesting of the Orbirotor shaking system and features Oxbo's push-pull cleaning system to thoroughly remove debris.

The 9140 provides ample on-board storage for both full and empty lug storage. The side deck is easily adjustable to provide additional deck capacity, or you can narrow the overall harvester width for picking narrow raspberry row widths. Our 3-wheel design provides for maximum in-field maneuverability. The engine compartment is easy to access for quick servicing, and the location also reduces harvester noise for the operators.

For international clients, the 9140 can be containerized, which significantly reduces transport costs.



The 9140 was designed around easy operation—easy to understand icons, diagnostics in both English and Spanish, and ergonomic controls



With a combination of our gentle Orbirotor picking heads and a single drop system the 9140 delivers IQF market quality fruit.



Efficiently harvest raspberries with as few as two people.



Three wheel design for optimum field maneuverability and tight turning radius. EcoMode for superior fuel economy.

✓ INTEGRATED CONTROLS

High resolution 7-inch color monitor for in-field adjustments and troubleshooting. Total control joystick puts all major functions at your fingertips. Multi-language controls and diagnostic screen. Available with an optional switch panel control box gives the driver options for harvester adjustments.



✓ AUTOMATED FUNCTIONS

Automatic steering system provides accurate row centering of the harvester, reducing in-field fruit loss and driver fatigue. Water proof sensors increase system reliability.






OXBO 9140

✓ **ORBIROTOR**

Pioneered by Oxbo, the multi-crop Orbirotor picking system uses an orbital shaking pattern and 5/8-inch acetyl rods. This picking system is easily adjustable to meet a wide range of picking requirements. As a free floating head, the Orbirotor moves with the plant and delivers a selective picking action—shaking off the ripe fruit and leaving the unripe fruit undamaged for the next pick.

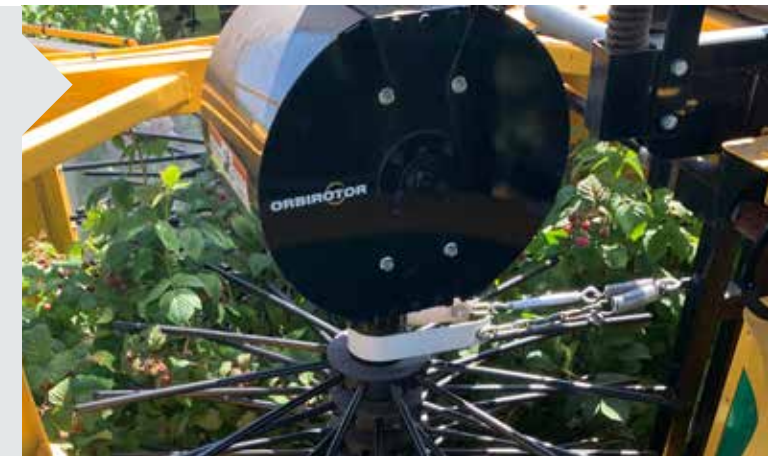

✓ **INTEGRATED TECHNOLOGY**

EvenFill on-board weighing system is designed to enable employees to accurately fill lugs and flats for more consistent product feeding and improved efficiencies in the processing plant.

The FleetCommand Telematics System offers users a comprehensive solution for fleet management and monitoring.



SIMPLE FRUIT DELIVERY SYSTEM

- Durable lexan catcher plates
- Single drop cup line provides excellent fruit quality
- Gentle on canes



PUSH-PULL CLEANING

- Delivers premium grade raspberries while removing the most debris
- Capable of picking IQF quality fruit
- Thoroughly removes leaves, with minimum impact to the fruit



ONBOARD STORAGE

- Durable bucket conveyance
- 10 inches of side deck adjustability
- Available canopy for employee comfort & consistent fruit temperatures



SPECIFICATIONS

Standard Features	
Engine	48hp Kubota
Tires	
Size	31 x 15.5-15
Optional Tires	35 x 19-16.1
Dimesions	
Length	17ft 8in (5.39m)
Shipping Length	14ft (4.27m)
Width	12ft 4.5in (3.77m)
Shipping Width	7ft 11in (2.41m)
Tunnel Width	4ft 4in (1.02m)
Minimum Height	10ft 5in (3.18m)
Tunnel Height	7ft 4in (2.24m)
Catching length	10ft (3.0m)
Inside Catchers	2ft 7in (0.79m)
Lift	23in (0.58m)



Visit our website
oxbo.com